

## HEAT-SHRINKABLE TUBING

### IRRAX™ SLEEVE


# IRRAX™ SLEEVE SBI300 / SBI350

## Insulation for Busbars in Switchgear

**IRRAX™ SLEEVE SBI300 and SBI350** are irradiated, cross-linked, thermally-stabilized, flame-retardant, flexible, heat-shrinkable polyolefin tubing for busbars protection in switchgear to reduce clearance of phase to phase. SBI350 has thicker wall thickness and more excellent insulation property than SBI300.

### ■ FEATURES

- Excellent electrical performance
- Protection against flashover
- Stable property for the continuous use in switchgear
- Flexible enough to heat-shrink on bent (90°) busbars
- Flame retardancy (Self-extinguish)

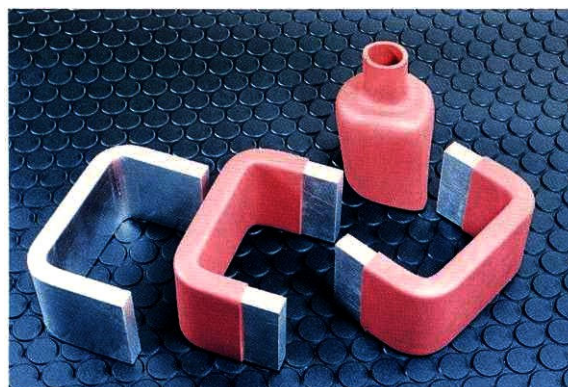

### ■ APPLICATIONS

- Insulation for busbars in switchgear up to 36kV
- Insulation and protection for busbars


### ■ PROPERTIES

Items	Test Method	Requirement	Typical Data
Dielectric Strength	JIS K 6911	10 kV / mm min.	39.5 kV/mm (Thickness 0.94 mm)
Volume Resistivity	IEC 93	—	$7.8 \times 10^{16} \Omega \cdot \text{cm}$
Dielectric Constant	IEC 250	—	2.7
Specific Gravity	ISO/R 1183	—	1.31
Tensile Strength	JIS K 6760	5.0 MPa min.	7.6 MPa
Ultimate Elongation	JIS K 6760	300 % min.	525 %
Accelerated Aging : at 160°C for 168 hours Tensile Strength Ultimate Elongation	JIS K 6760	5.0 MPa min. 200 % min.	9.6 MPa 490 %
Low Temperature Flexibility (at -40°C for 4 hours)	ASTM D2671 C	No cracking	No cracking
Operation Temperature Range	—	-40 ~ 110 °C	—
Flammability	UL224 VW-1	Pass	Pass
Water Absorption (at 23°C for 24hours)	ISO 62	—	0.45
Shrinking Temperature (Start / Finish)			70 °C / 100 °C

## ■ COLOR

Red

## ■ SIZE

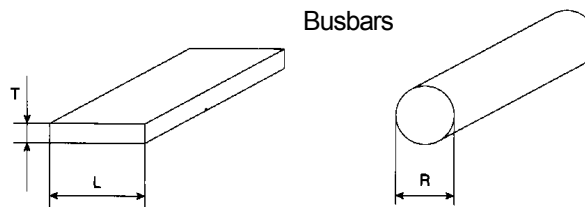

Grade	Trade Size	As Supplied		After Shrinkage		Unit Length (min.) [m]	Suitable Busbar Size	
		Inside Diameter (min.) [mm]	Wall Thickness (nom.) [mm]	Inside Diameter (max.) [mm]	Wall Thickness (nom.) [mm]		Rectangular L+T (min.) (max.) [mm]	Round R (min.) (max.) [mm]
SBI300	6/15	15.0	1.10	6.0	2.00	25	12 ~ 18	6.5 ~ 12.0
	12/30	30.0	1.10	12.0	2.30		22 ~ 38	13.5 ~ 25.0
	20/50	50.0	1.10	20.0	2.50		36 ~ 65	22.0 ~ 43.0
	30/75	75.0	1.10	30.0	2.50		55 ~ 95	33.0 ~ 63.0
	40/100	100.0	1.10	40.0	2.50		70 ~ 130	44.0 ~ 86.0
	50/120	120.0	1.30	50.0	3.00		90 ~ 165	55.0 ~ 105.0
SBI350	10/25	25.0	1.60	10.0	4.00	25	17 ~ 28	11.0 ~ 20.0
	16/40	40.0	1.60	16.0	4.00		28 ~ 45	18.0 ~ 32.0
	25/65	65.0	1.60	25.0	4.00		45 ~ 67	28.0 ~ 47.0
	40/100	100.0	1.60	40.0	4.00		67 ~ 102	44.0 ~ 72.0

Longitudinal Change -15 % min.

## ■ MINIMUM CLEARANCES (Typical data)

	Commercial Voltage	Impulse Voltage	Phase to Phase Clearances for Rectangular Busbars
SBI300	12kV	75kV	20mm min.
SBI300	24kV	125kV	70mm min.
SBI350	36kV	170kV	120mm min.

**(Notice)** The information contained in this catalogue is believed to be correct and in accordance with accepted engineering practices. Because of the varied nature of the uses for these products each user should make their own evaluations regarding the suitability of these products for their specific application. Sumitomo Electric Industries, Ltd. makes no warranties regarding the accuracy and completeness of the information and data contained herein, and disclaims any liability from the use or misuse of its products.

Sumitomo Electric Industries, Ltd. shall not be liable for any injury, loss or damage either directly, indirectly or as a consequence arising from the use or misuse of its products mentioned in this catalogue, other than replacement of materials considered defective.

# SUMITOMO ELECTRIC INDUSTRIES, LTD.

### ■ Japan [Sales]

#### SUMITOMO ELECTRIC INDUSTRIES, LTD.

Osaka Gr., Irradiated Sales Div., Fine Polymer Sales Dept.,  
Electronics Sales Unit

4-5-33, Kitahama, Chuo-ku, Osaka, 541-0041, JAPAN  
Tel: +81-6-6220-4280 Fax: +81-6-6220-4104

### ■ Overseas [Sales & Manufacture]

#### SUMITOMO ELECTRIC INTERCONNECT PRODUCTS, INC.

915, Amorlite Drive, San Marcos, CA 92069-1440, USA  
Tel: +1-760-761-0600 Fax: +1-760-761-0625

#### SUMITOMO ELECTRIC SCHRUMPF-PRODUKTE, GmbH

Oststrasse 89, D-22844 Norderstedt, GERMANY  
Tel: +49-40-526-5010 Fax: +49-40-526-4808

#### SUMITOMO ELECTRIC INTERCONNECT PRODUCTS (HONG KONG) LTD.

Suite 2301, 23rd Fl., Caroline Centre, Lee Gardens II, 28 Yun Ping Rd.,  
Causeway Bay, HONGKONG  
Tel: +852-2805-6777 Fax: +852-2504-4690

### [Manufacture]

#### SUMITOMO ELECTRIC FINE POLYMER, INC.

1-950, Asashironishi, Kumatori, Sennan, Osaka 590-0451, JAPAN  
Tel: +81-724-52-1301 Fax: +81-724-53-0397

#### SUMI-PAC CORPORATION

8 Fl., No.34, Chung Shan North Rd., Sec.3, Taipei, TAIWAN R.O.C.  
Tel: +886-2-2599-7382 Fax: +886-2-2599-7377

#### SUMITOMO ELECTRIC FINE POLYMER(SUZHOU) LTD.

No.232, Jinfeng Rd., SND, Suzhou, Jiangsu, CHINA  
Tel: +86-512-8918-6680 Fax: +86-512-8918-6686