

HEAT-SHRINKABLE TUBING

IRRAX™ SLEEVE

IRRAX™ SLEEVE SCM2

Medium Wall Tubing for Encapsulation and Anti-Corrosion

IRRAX™ SLEEVE SCM2 is irradiated cross-linked, thermally-stabilized, polyolefin heat-shrinkable tubing with high performance hotmelt adhesive inner liner which melts and flows during heat-shrinking.

■ FEATURES

- Very flexible
- Dual wall, hotmelt adhesive inner liner
- High shrink ratio, 3:1
- Quick shrink
- Excellent adhesion to metal, polyethylene and polyvinylchloride



■ APPLICATIONS

- Joint cover of cable and pipe
- Termination of low voltage cable
- Connector cover of CATV
- Replacement of tapes

■ OUTER LAYER PROPERTIES

Items	Test Method	Requirement	Typical Data
Tensile Strength	ASTM D 638	10.0 MPa min.	21.7 MPa
Ultimate Elongation	ASTM D 638	350 %	568 %
Accelerated Aging : at 150°C for 168 hours			
Tensile Strength	ASTM D 638	8.0 MPa min.	23.5 MPa
Ultimate Elongation		300 % min.	532 %
Low Temperature Flexibility : at -55°C for 1 hour	ASTM D 2671	No Cracking	No Cracking
Hardness	ASTM D 2240 (Type D)	—	41
Volume Resistivity	ASTM D 876	$1 \times 10^{13} \Omega \cdot \text{cm}$ min.	$2 \times 10^{14} \Omega \cdot \text{cm}$
Dielectric Constant	IEC 250	—	4.1
Shrinking Temperature (Start / Finish)	—	—	70°C / 90°C
Tracking Resistance	ASTM D 2303	—	Pass at 2.75 kV for 60 minutes
Weather Resistance : for 4,000 hours Tensile Strength / Ultimate Elongation	JIS A 1415 (Type WS)	—	94 % / 91 % of the value obtained unweathered sample



SUMITOMO ELECTRIC INDUSTRIES, LTD.


SIZES

Trade Size	As Supplied	After Shrinkage		Unit Length (min.) [mm]
	Inside Diameter (min.) [mm]	Inside Diameter *1 (max.) [mm]	Wall Thickness *1 (nom.) [mm]	
04 – 1220	10.2	3.80	1.50	1,220
07 – 1220	19.0	5.60	2.00	
11 – 1220	28.0	9.5	2.00	
13 – 1220	33.0	10.2	2.30	
15 – 1220	38.1	12.7	2.30	
17 – 1220	44.0	14.0	2.30	
20 – 1220	52	18.2	2.30	
27 – 1220	70	25.5	2.30	
35 – 1220	90	30.0	2.50	
50 – 1220	125	40.0	2.50	

Longitudinal Change : -10 % min.

*1 Outer layer only

ADHESION PROPERTY

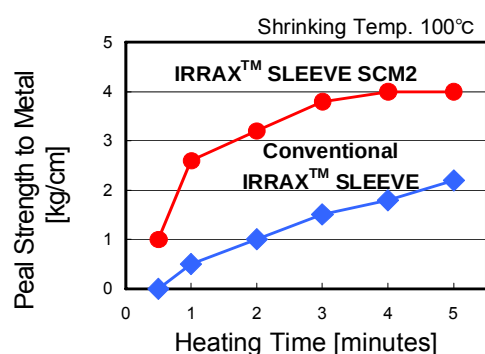

COLOR

Black

MARKING

IRRAX SLEEVE SCM2 XX

XX indicates Trade Size

(Notice) The information contained in this catalogue is believed to be correct and in accordance with accepted engineering practices. Because of the varied nature of the uses for these products each user should make their own evaluations regarding the suitability of these products for their specific application. Sumitomo Electric Industries, Ltd. makes no warranties regarding the accuracy and completeness of the information and data contained herein, and disclaims any liability from the use or misuse of its products.

Sumitomo Electric Industries, Ltd. shall not be liable for any injury, loss or damage either directly, indirectly or as a consequence arising from the use or misuse of its products mentioned in this catalogue, other than replacement of materials considered defective.



SUMITOMO ELECTRIC INDUSTRIES, LTD.

Japan [Sales]

SUMITOMO ELECTRIC INDUSTRIES, LTD.

Shibaura Renasite Tower, 3-9-1, Shibaura, Minato-ku, Tokyo 108-8539, JAPAN
Tel: +81-3-6722-3344 Fax: +81-3-6722-3345

Overseas [Sales & Manufacture]

SUMITOMO ELECTRIC INTERCONNECT PRODUCTS, INC.

915, Armortite Drive, San Marcos, CA 92069-1440, USA
Tel: +1-760-761-0600 Fax: +1-760-761-0625

SUMITOMO ELECTRIC SCHRUMPF-PRODUKTE, GmbH

Oststrasse 89, D-22844 Norderstedt, GERMANY
Tel: +49-40-526-5010 Fax: +49-40-526-4808

SUMITOMO ELECTRIC INTERCONNECT PRODUCTS (HONG KONG) LTD.

Suite 2301, 23rd Fl., Caroline Centre, Lee Gardens II, 28 Yun Ping Rd., Causeway Bay, HONGKONG
Tel: +852-2805-6777 Fax: +852-2504-4690

[Manufacture]

SUMITOMO ELECTRIC FINE POLYMER, INC.

1-950, Asashironishi, Kumatori, Sennan, Osaka 590-0451, JAPAN
Tel: +81-72-452-1301 Fax: +81-72-453-0397

SUMI-PAC CORPORATION

8 Fl., No.34, Chung Shan North Rd., Sec.3, Taipei, TAIWAN R.O.C.
Tel: +886-2-2599-7382 Fax: +886-2-2599-7377

Sumitomo Electric Fine Polymer (Suzhou) Ltd.

Shanghai branch

Room F, 12/ F Huamin Empire Plaza No.728 Yan An Road (W)
Shanghai, CHINA
Tel: +021-6212-6600 Fax: +021-5237-3196